


The Bike Shelf™

BY
KNIFE & SAW
~ SF, CA ~

*Thank you for purchasing
The (original) Bike Shelf from
Knife & Saw. I hope you and
your bike enjoy it.*

CHRIS BRIGHAM / PRINCIPAL, KNIFE & SAW

In the Box

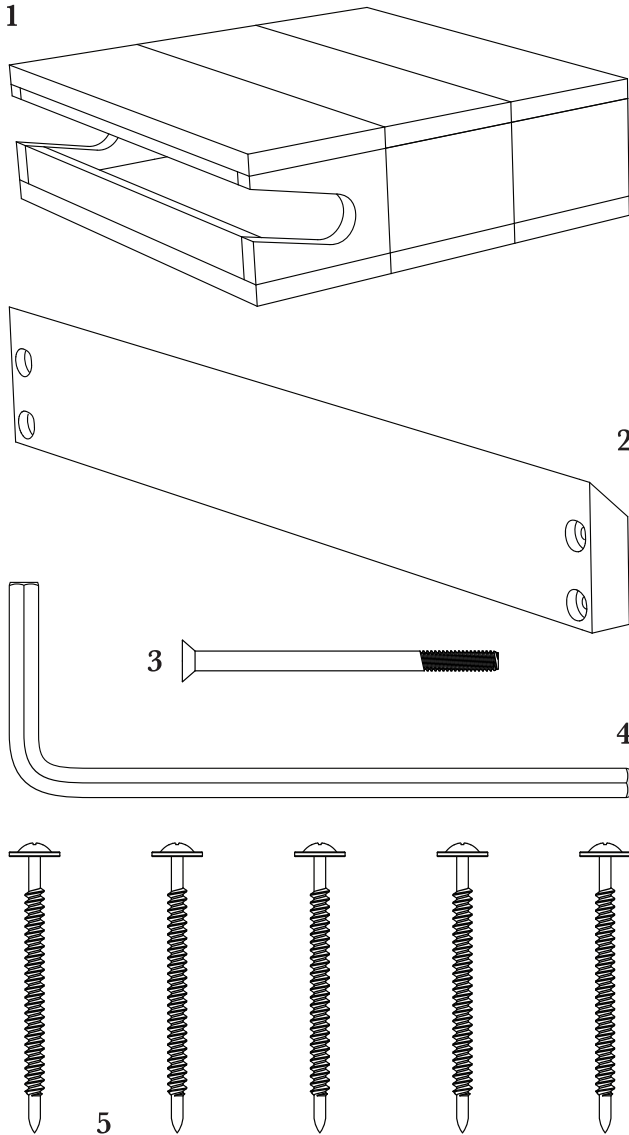

Included:

1. (1) Bike Shelf
2. (1) Mounting Cleat
3. (1) Socket Head Cap Screw
4. (1) Allen Wrench
5. (5) #8 Pan Head Wall Screws
(in case you lose one)

Tools Needed / Nice to Have:

1. Screw Gun / Drill
2. Phillips Head Screwdriver
3. Level

Instructions

Step 1:

Remove the mounting cleat from The Bike Shelf by removing the bolt on the top/back of The Bike Shelf.

Find and mark wall studs where you want to hang The Bike Shelf. The mounting cleat has 2 sets of holes at 16" apart.* If you are unable to attach to two studs, please attach one side to a stud and the other using drywall anchors (found at a local hardware store).


*Standard distance between wall studs is 16" (~406mm) apart on center in most countries

Step 2:

Using a level if possible, hold the mounting bracket up to wall at the desired height and mark where the holes line up. Next, pre-drill your marked holes.


Step 3:

Using the screws provided, secure the mounting cleat to the wall.

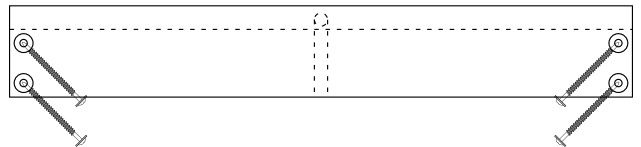

Step 4:

Once mounting cleat is securely attached to the wall, slide The Bike Shelf over and onto it so the opposing cleat on inside back of the shelf locks into it.

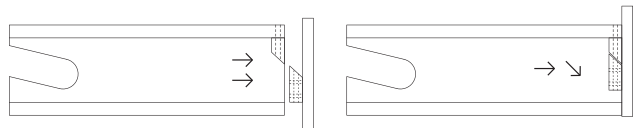

Step 5:

Once The Bike Shelf is all the way on the mount and against the wall, re-insert the bolt and tighten it with the provided allen wrench.

Step 6:

Hang your bike and enjoy.

Knife and Saw LLC disclaims all liability for damage or injury resulting from the improper installation or use of The Bike Shelf to the fullest extent permitted by law. The Bike Shelf is intended to be secured to 2 wall studs. Weight limit for hanging bike is 40lbs. Do not ever sit on, stand on, or hang from The Bike Shelf.